

(12) PATENT (11) Application No. AU 200244365 B2  
(13) AUSTRALIAN PATENT OFFICE (10) Patent No. 776816

(34) The Method and apparatus for delivering aerosolized medication  
(31)6 International Patent Classification(s) A61M 015/00  
(21) Application No. 200244365 (22) Application Date: 2002.05.23  
(43) Publication Date: 2002.07.11  
(42) Publication Journal Date: 2002.07.11  
(44) Accepted Journal Date: 2004.09.23  
(52) Division of 199910847  
(71) Applicant(s) Systemic Pulmonary Delivery, Ltd.  
(72) Inventor(s) Thomas Alex Arner; Bryce Durwick Evans; Hamed Mohsen Mohsen; Richard Matthew Pevkov; Atul M. Sudhakar  
(74) Agent/Attorney E F Wellington and Co, 312 St Kilda Road, MELBOURNE VIC 3006  
(50) Related Art US 5060643

ABSTRACT

Method and apparatus for delivering aerosolized medication employing a variable volume device and a constant resistor.

AUSTRALIA  
PATENTS ACT 1990  
REGULATION 13

Name of Applicant: SYSTEMIC PULMONARY DELIVERY, LTD.  
Actual Inventor(s): THOMAS ALEX ARNER, BRYCE DURWICK EVANS, HAMED MOHSEN MOHSEN, RICHARD MATTHEW PEVKOV AND ATUL M. SUDHAKAR

Address for Service: E.F. WELLINGTON & CO.,  
Patent and Trade Mark Attorneys,  
312 St. Kilda Road,  
Melbourne, Queensland,  
Victoria, 3006.

Invention Title: "METHOD AND APPARATUS FOR DELIVERING AEROSOLIZED MEDICATION".

Details of Associated Prioritized Applications: None

The following statement is a full description of this invention including the best method of performing it known to us.

METHOD AND APPARATUS FOR DELIVERING

AEROSOLIZED MEDICATION

Field of the Invention

The present application, which is a divisional application derived from application No. 200244365, relates to methods and apparatus for delivering a dose of aerosolized medication for inhalation by a patient into the lungs.

Background of the Invention

Animals are breathing using nasal for delivering medication for

1. Conspicuous examples of the lungs. For example, in the treatment of asthma, inhalers are commonly used for delivering bronchodilators such as  $\beta_2$  agonists and anti-inflammatory agents such as corticosteroids. Two types of inhalers are in common use, pressurized dose inhalers (PMDI) and dry powder inhalers (DPI). Both types have as their object the delivery of medication, which is typically in the form of a solid

2. particles or powder, into the airways of the lungs at the location of the medicine being sought.

In the MDI device, the medication is provided by the pressurized container in a pressurized aerosol solution, with the medication being suspended

or dissolved in a liquid propellant such as a Chloroacetic Acid (CCA) or hydrochloric acid (HCl). The container includes a mounting valve having a bellows discharge arm which can be depressed inward into the container to discharge a controlled volume of propellant-oxidizer mixture in the form of an aerosol comprising the droplets of propellant in which particles of the oxidizer are suspended in dissolved. A typical MCD for use with such a container includes a nozzle having an orifice and nozzle. The container is lowered into the landing vehicle below discharge arm of the container being moved to a base in the container. Depressing the closed end of the container causes the aerosol to be pushed toward the container so that a controlled volume of oxidizer is discharged through the nozzle. The landing vehicle defines a flowpath by 044 communication with the nozzle, the flowpath having an orifice in a nozzle-like portion of the landing, such that the aerosolized oxidizer may be injected after it exits the nozzle portion. The jet of oxidizer leaves the nozzle and the nozzle with the flow closed around the nozzle, or into the nozzle in a slight distance away from an open mouth. The particle size depends on the pressure to discharge the oxidizer, and electrolytic heating.

Existing MCDs suffer from a number of significant disadvantages. One problem with existing MCDs is poor delivery efficiency of the oxidizer. It has been estimated that on average, with existing MCDs, only about 10 percent of the

oxidizer that which is deposited from the container actually reaches the target where it can achieve the intended effect.

Poor delivery efficiency is caused by a number of factors. One of these is incomplete expansion of propellant, resulting in a large portion of the aerosol mass being delivered in a form which cannot be injected into the target. For effective delivery of aerosolized oxidizer to the droplets of the target, it is desirable that most of the particles which are injected be less than 10 microns (one micron = one-thousandth of a millimeter) in size, and preferably between about 1 micron and 3 microns. Incomplete expansion of propellant at the outlet of the nozzle results in a substantial fraction of the aerosol mass being delivered in the form of relatively large liquid droplets instead of the dry particles desired. Such droplets cannot be injected, but rather tend to impact the target and at the back of the target's throat, with the result that much of the oxidizer is ineffective. The local concentration of oxidizer in the nozzle and throat can cause local laminar-turbulence regions, as well as development of flow instabilities in the case of continuous flow. Additionally, recirculation of gas causes reduction of the overall velocity of the propellant mass, which decreases efficiency and velocity of the aerosol. Further, the vented oxidizer has been estimated to cost U.S. dollars about \$200 million per year.

Another disadvantage concerning the problem of poor delivery efficiency is high throat velocity of the aerosol as it exits the nozzle, which results in a

loss of the aerosol in the nozzle and throat. Usually, the velocity of the aerosol exceeds much the velocity of the ground's target which is the particles are intended to be injected and carried into the target. With many existing MCDs, the exit velocity of the aerosol substantially exceeds the velocity of the ground's target. The high-velocity plume exiting the back of the throat, thereby impeding and reducing the number of particles contributing to the poor delivery efficiency of existing MCDs is excessive length of the plume or failure of aerosol exiting the device. To existing MCDs, this length typically exceeds 10 centimeters, which makes it difficult for the plume to inject the target.

In an effort to decrease plume velocity, some MCD designs have added intake spaces between the aerosol nozzle and the nozzle. Although these intake spaces improve delivery efficiency, some of the drug which is discharged from the nozzle impacts and sticks on inner surfaces of the intake, and is therefore unavailable for injection by the user. Thus, MCDs with intake air reduce both delivery efficiency and delivery efficiency.

Furthermore, although they provide inherent inherent avoid some of the disadvantages of existing MCDs, such as excessive aerosol velocity, they still suffer from the problems of incomplete expansion of oxidizer and sticking of oxidizer on the inner surfaces of the device, particularly under certain performance conditions such as high relative humidity, which results in some particle agglomeration.

Another problem with existing MCDs is the difficulty patients have in controlling their inhalation with the discharge of the aerosol. In manually operated MCDs, patients frequently inhale too early or too late or otherwise inject the oxidizer. Although a number of breath-actuated MCDs have been devised to address this problem, most of them involve some discharge at the very onset of the patient's inspiratory effort. Depending on the lung condition being treated and its location, a drug effect may occur desirable for the oxidizer to be discharged near the peak of the patient's inhalation rather than the beginning. Further, it may be desirable to be able to selectively vary the peak of the patient's inhalation in which oxidizer is discharged to enter or enter the location of drug delivery in the condition being treated. These advantages are not possible with existing MCDs.

Accordingly, it has been an object of the present invention to provide a method and apparatus for delivering an aerosolized oxidizer in which the expiratory fraction of the aerosol mass (i.e., the fraction in the form of dry particles of the aerosol mass) is substantially at the end of the expiration.

It has been a further object of the present invention to provide a method and apparatus for delivering an aerosolized oxidizer in which the throat velocity of the aerosol at the exit of the apparatus approximately matches the velocity of the patient's inspired breath.

It has been another object of the invention to maintain diagnostic and timing of the drug particles in the form of an aerosol within an inhaler apparatus.

It has been a still further object of the present invention to provide a method and apparatus for delivering an aerosolized medication in which the length of the tubes of aerosolized medication which enter the apparatus is as short as possible.

A further object of the invention has been to provide a method and apparatus for maintaining the suspension of liquid propellant in an inhaler.

Still another object of the invention has been to provide a method and apparatus for delivering an aerosolized medication in which impaction and sticking of medication in the lower walls of the apparatus is minimized.

It has been another object of the present invention to provide a method and apparatus for delivering an aerosolized medication in which the discharge of medication is synchronized with the patient's inspired breath, and in which the timing of the discharge is such that the patient's breath can be substantially varied.

Summary of the Invention

The above and other objects of the invention are achieved by the methods and apparatus of the invention in which flow control mechanisms and devices are used to produce mixing of the propellant-medication mixture with air in increasing expansion of propellant, to slow down the aerosol phase before it reaches the exit of the apparatus, and to reduce the impaction of aerosol on the lower walls of the apparatus. The invention also provides an apparatus and method for synchronizing the actuation of the container with the patient's inspiratory effort carried on the inspiration of the apparatus.

In one embodiment of the invention, the apparatus is configured so that the nozzle discharge orifice directs a plume toward the open end of the nebulizer.

The air tube is arranged to draw air in from the open end of the nebulizer so as to impinge on the plume. The air tube is supported within the mouth by one or

more hollow spacers connected to the wall of the mouth, with the hollow passage of each spacer being connected at one end to a corresponding passage through the mouth wall to suck air outside the mouth and at the other end to the tube of the air tube. When the patient inhales on the open end of the nebulizer, air is drawn into the air tube to cause air to exit the air tube. Once this air has been conditioned, the container is actuated to discharge a plume of aerosol toward the air jet. The plume and air jet meet, causing mixing and deceleration of the plume.

In another embodiment of the invention, the nozzle is positioned so that a plume away from the open end of the nebulizer toward the end of the mouth, which end is substantially closed by an end wall. The air tube is mounted on the end wall, with the tube of the air tube connected to a passage through the end wall to suck air outside the mouth. Exhalation by a patient on the open end causes air to be drawn through the air tube in a direction toward the patient's mouth. Once the air jet from the air tube has been conditioned, the container is actuated to direct a plume toward the closed end of the mouth. The air jet and plume meet, causing mixing and deceleration of the plume. The plume then enters directly into the

More specifically, the invention provides a method and apparatus including a housing adapted to support a pressurized container, the housing having an actuator and nozzle assembly with a hose adapted to receive the hollow nozzle stem of the container, the housing further including a generally tubular member having an open end defining a nebulizer adapted to be inserted into the mouth of a user, a nozzle discharge orifice of the actuator and nozzle assembly being positioned to direct a plume of aerosolized medication into the mouth; and an air tube supported within the mouth and having an air tube inlet opening opposite the nozzle discharge orifice and an air tube tube in fluid communication with ambient air outside the mouth. The air tube being oriented so that air flowing out of the air tube inlet is directed so as to impinge on a plume of aerosolized medication discharged from the container through the nozzle discharge orifice. Thus, an inspiratory effort carried on the nebulizer causes air to flow into the air tube inlet and out the air tube outlet to impinge on the plume and thereby enhance dispersion and mixing of the medication within the mouth. The air jet from the air tube also causes the plume to slow down so that the velocity of the aerosol exiting the device approximately matches the velocity of a patient's inspired breath. Drawing down the plume also increases the residence time of the aerosol within the apparatus and leads to a slower release to be inhaled. The increased mixing and residence time produce more complete expansion of propellant at the exit of the nebulizer.

making the nebulizer, so that the same length of mouth is used twice, thereby further increasing residence time of the aerosol within the device.

To reduce impaction and sticking of medication on the lower walls of the apparatus, the invention provides an aerosol flow control apparatus, useful for either MDI or DPI devices, including a housing defining a mouth, the mouth having an open end defining a nebulizer and a substantially closed end defined by an end wall remote from the nebulizer, with a medication dispenser assembly being arranged within the housing to direct medication into the mouth. The medication dispenser may be a pressurized container with actuator and nozzle, or alternatively may be a dispenser for medication in dry powder form. The end wall includes a plurality of auxiliary air tubes in fluid communication with ambient air outside the mouth, the auxiliary air tubes opening into the mouth adjacent the lower wall of the mouth, in a direction generally toward the open end of the nebulizer. The mouth further includes a plurality of vertical passages connected to the lower wall thereof. Movement of the auxiliary air tubes, the auxiliary air tubes and vertical passages cooperating to establish a turbulent air flow along the lower wall of the mouth upon an inspiratory effort being carried on the nebulizer. The auxiliary air flow acts as a buffer or boundary layer flow along the lower wall of the mouth, reducing the likelihood of aerosol impaction on dry particles impinging and prematurely sticking to the lower wall. The vertical passages preferably comprise inwardly directed vanes

which are adapted in no way to the inlet direction so as to impart speed and vorticity to the air flowing over them.

The invention further provides an exhaust flow control apparatus for use with a pressurized container of medication, in which discharge of the aerosol phase is caused by the patient's inspiratory effort, with the timing of the discharge in relation to the inhalation being selectively variable. To this end, the apparatus includes a housing adapted to support the container between a first position in which the discharge area of the container is in an operative position to discharge a measured volume of medication, the housing further including an outlet through which a user can inhale, the outlet defining a primary air passage. A chamber provided is arranged in the housing and is accessible from a rear position in which relative movement between the container body and discharge area is prevented so a discharge position in which such movement is permitted. The container includes a part of, or alternatively is, attached to, a device such as a bellows or a variable displacement pump assembly which defines a variable-volume chamber. The chamber includes a resilient member which urges the container into the second position upon movement of the container towards the discharge position. A secondary air passage extends through the housing between the primary air passage and outlet air outside the housing, the secondary air passage including a valve. The variable-volume chamber is in fluid communication with a chamber of the venturi, whereby inhalation of a user through the

venturi causes a low pressure in the venturi throat so as to increase air flow to chamber and thereby cause the container member to move into the discharge position. By appropriate selection of design parameters such as the chamber cross-sectional area, the force exerted by the resilient member on the container, the venturi size, and the secondary air passage diameter, the device can be designed to cause activation of the container near the peak of a patient's inspiratory effort.

The device preferably further includes means for selectively varying the timing of activation. For instance, the device may include an adjustment screw interfitting into the secondary air passage to act as a variable flow restriction. Turning the screw one direction increases the amount of flow restriction, such that for a given inspiratory rate through the mouthpiece, the amount of time required to overcome the chamber sufficiently to cause activation is increased. Conversely, rotating the screw in the opposite direction decreases the amount of time required to cause activation.

There are other objects and advantages of the present invention which become more apparent from the accompanying drawings and the description thereof. Brief Description of the Drawings

The accompanying drawings, which are incorporated in and constitute a part of this specification, illustrate various embodiments of the invention and, together with the general description of the invention given above and the detailed description given below, serve to explain the principles of the invention.

FIG. 1 is a perspective view of an inhaler in accordance with the principles of the present invention.

FIG. 2 is an exploded view of the inhaler of FIG. 1.

FIG. 3 is a cross-sectional view of the inhaler taken along lines 3-3 of

FIG. 1.

FIG. 3A is a partial cross-sectional view showing an alternative construction of the container and nozzle of the inhaler.

FIG. 4 is a cross-sectional view similar to FIG. 3, showing an alternative construction of the inhaler.

FIG. 5 is a cross-sectional view similar to FIG. 3, showing yet another alternative construction of the inhaler.

FIG. 6 is a cross-sectional view of the inhaler of FIG. 3 taken on a plane parallel to that of FIG. 3.

FIG. 7 is a cross-sectional view of an alternative construction of the invention, having features for achieving automatic activation of a container responsive to a patient's inhalation through the inhaler.

FIG. 8 is a perspective view of the trigger which engages and disengages the container in the inhaler of FIG. 1.

FIG. 9 is a side elevational view, partly in cross-section, of yet another construction of the invention, showing an alternative arrangement for achieving automatic activation of a container responsive to a patient's breath.

Brief Description of the Drawings

FIGS. 1-3 depict a first embodiment of an inhaler 10 in accordance with the principles of the invention. The inhaler 10 includes a housing 11 which has a receptacle portion 14 connected to a nozzle 16. The receptacle portion 14 is in the form of a chamber adapted to receive a measured pressurized container 13 containing a medication. The container 13 forms no part of the present invention. The inhaler apparatus of the present invention is usable with any standard pressurized container having an internal venting valve with a hollow discharge area which may be depressed inwardly only in response to the container body from an inoperative position in which discharge of medication is prevented, to an operative position in which a measured volume of the container contents is discharged through the hollow discharge area.

The nozzle 16 includes an open end 20 spaced from the receptacle portion 14, and a closed end 22 defined by an end wall 24 which is connected to the receptacle portion 14. The end wall 24 preferably is generally circular or rectangular in shape, with an open cut wall 26 forming the portion of the end wall 24 between the open end 20.

With reference to FIG. 1, the housing 11 further includes an anterior end member 28 supported by the end wall 24. The anterior end member 28 includes a beam 23 which is adapted to receive the hollow discharge area (not shown) of the container 13, and a nozzle discharge orifice 18 in fluid

concentration with the hole 23. The nozzle discharge outlet 20 is subsequently located in the open end of the wall 24 and directed in front as a normal plane generally along the axial longitudinal axis 22 of the nozzle. The outlet 20 preferably has an internal diameter at the exit of less than about 0.002 inch, and more preferably between about 0.001 inch and about 0.002 inch.

Thus, upon the customer 13 being depressed in the downward direction in FIG. 1, a normal volume of medication will be discharged from the hole 23 and out the outlet 20 in form of a generally conical piece of aerosolized medication while the nozzle 15, directed generally toward the open end 20 thereof. The inlet 10 includes features which promote dispersion and mixing of the aerosolized medication with air which the nozzle 15 induces expansion and decrease the velocity of the liquid propellant discharged from the customer 13. More specifically, the inlet 10 includes an air inlet 34 supported within the nozzle 15. The air inlet 34 has an outlet 36 which is spaced transversely of and is opposing relationship with the nozzle discharge outlet 20, and an inlet 38 which is in fluid communication with ambient air within the nozzle 15. In the embodiment shown in FIGS. 1-3, the air inlet 34 is a hole which has a generally axial portion 40 which is generally aligned along the nozzle's longitudinal axis 22, and a generally radial portion 42 which is directed in the lower wall 44 of the nozzle 15. When a user exerts an inspiratory effort on the open end 20 of the nozzle 15, air is drawn from within the nozzle 15 into the air inlet 34, mixing the air into outlet 36 in a direction toward the nozzle discharge

Although the cross-section claimed by FIGS. 1-3 and 7 show the air inlet 34 has an angle of 90 degrees with the portion 40 generally aligned with the axis 41 (FIG. 2) of the nozzle outlet 20, other arrangements may be used without restricting the scope of the invention. For example, the portion 40 may be arranged in an obtuse angle (i.e., between about 70 degrees and 180 degrees, 120 degrees being defined as exactly opposite to the direction of a plane extending the axis 41 to the axis 41 of the nozzle outlet 20, with the portion 40 of air inlet 34 being inclined to direct to air jet at the outlet 20. Additionally, the portion 42 which attaches to the nozzle wall need not be radial, but can be inclined in an acute or obtuse angle to the nozzle wall 44.

The invention further includes features which reduce the likelihood of liquid droplets or dry particles impinging and permanently sticking to the lower wall 36 and 44 of the nozzle 15. More particularly, the inlet 10 includes a plurality of secondary air inlets 46 through the wall 24 and circumferentially spaced therearound in a lower area distal from the nozzle outlet 20. A flow circumferential ring of secondary air inlets 46 are located adjacent the junction 48 between the wall 24 and the lower wall 44 of the nozzle 15. A second circumferential ring of secondary air inlets 47 are located radially between the junction 48 and the upper outlet 20. An inspiratory effort exerted on the open end 20 of the nozzle 15 causes air to flow into the secondary air inlets 46 and 47 as indicated by arrows 28, and around the nozzle along the lower wall 44 of the nozzle 15 and

outlet 20. The portion 40 of air inlet 34 is located and oriented within the nozzle 15 so that air flowing out from the inlet 34 impinges on a plane of aerosol mixing the nozzle outlet 20. Once this air flow from the inlet 34 has been established, the entering volume of the customer 13 is assumed to discharge a piece of aerosolized medication from the outlet 20. The impingement of air from air inlet 34 on the plane causes the plane to flow down and be displaced so as to induce a larger portion of the cross section of the nozzle 15. The result is enhanced mixing of the aerosol with air, which promotes more complete expansion of liquid propellant by the time the aerosol enters the open end 20 of the nozzle 15, and a reduction in velocity of the plane exiting the open end 20 so that it approaches the velocity of the inspiratory breath. Accordingly, a given fraction of the mass of medication dispensed from the customer 13 into the open end 20 in the form of respirable dry particles of the optimum size of about one to five microns moving at a relatively low velocity that substantially matches the inspiratory breath velocity, as opposed to relatively large liquid droplets moving at a relatively high velocity. Impingement and mixing of medication within the nozzle and throat are thereby reduced.

The air inlet 34 and nozzle 15 can be longitudinally formed of one piece, with the internal passage of the air inlet 34 extending through the nozzle 15 to maintain fluid communication with air within the nozzle 15. Alternatively, the air inlet 34 can be formed of a second side body less than the upstream configuration and attached to the nozzle 15 at the inlet end 20.

around lower wall 24, as indicated by arrows 28. This secondary air flow forms a buffer or boundary layer air flow along the lower wall 44 and wall 36 which tends to reduce the impingement and permanent sticking of medication on lower wall 44 and wall 36.

To the further refinement of this art, the inlet 10 also includes a plurality of water passages or vents 26 (also seen in FIG. 2) situated on the lower wall 44 of the nozzle 15 and extending longitudinally therefrom. The vents 26 are located downstream of the secondary air inlets 46, with each vent 26 submergently being located approximately in axial alignment with one of the secondary air inlets 46. The vents 26 are oriented at an angle to the axial direction defined by longitudinal axis 22, so that secondary air flow is opposed to air flowing over them. Thus, the boundary layer air flow caused by secondary air inlets 46 encompasses the vents 26, which helps secondary air and water in the boundary layer air flow. This secondary air and water further reduce the likelihood of aerosol droplets or particles impinging and permanently sticking to the lower wall 44.

As shown in FIGS. 1 and 3, the inlet 10 includes a separate mouthpiece 28 which connects to the open end 20 of the nozzle 15. The mouthpiece 28 has a tapered distal portion 22 adapted to be inserted into the mouth of a user of the inhaler 10. After completely extending, the user inserts the portion 22 into the mouth with the lips closed around the portion 22, and then begins to inhale, which aspirates air flow from the air inlet 34 and through the secondary air inlets 46. Once

down air flow are considered and while remaining to intake, the user depresses the chamber 12 to discharge a controlled volume of medication and propellant mixture from the nozzle discharge orifice 20. The user continues to hold in 20 the lungs to their capacity, and then typically holds the nozzle for a period of time to allow the aerosolized medication to settle within the airways of the lungs.

As shown in FIGS. 1-3, the housing 12 is formed in four sections including the receptacle portion 14, end wall 24, and the mouth 18 up to and including the nozzle 20, and a second section including the portion of mouth 18 housing the air tube 24 and the mouthpiece 26. Alternatively, the housing 14 may be formed in two sections split on a longitudinal plane through the mouth, the two sections being generally mirror images of each other which are joined together along the plane of symmetry. Nevertheless, for descriptive purposes, an embodiment having four sections is shown and described.

A first section 14 includes the receptacle portion 14, the end wall 24 and actuator and nozzle assembly 26, and a generally cylindrical portion 42 which forms a part of the mouth 18 and is connected to the end wall 24 at the junction 48. The first section 14 advantageously is longitudinally formed of one piece, although it may alternatively be formed in multiple pieces which are subsequently joined together.

A second section 16 includes a second generally cylindrical portion 64 whose lower end outer diameter is equal to those of the first generally cylindrical portion 42, and a reduced-diameter portion 68 which is telescopically received within the downstream open end of first cylindrical portion 62. The portion 68 has an inner wall 70 which is generally conical, converging slightly in the axial direction toward the mouthpiece 26. The nose 24 are mounted on the lower wall 70. Second section 64 preferably is longitudinally formed of one piece, although it may alternatively be formed in multiple pieces which are subsequently joined.

A third section 72 of the housing 12 includes a third generally cylindrical portion 74 whose lower end outer diameter is equal to those of the second generally cylindrical portion 64, and a reduced diameter cylindrical portion 76 which is telescopically received within the open downstream end of second generally cylindrical portion 68. The outer diameter of portion 76 is approximately equal to the lower diameter of portion 68 so as to provide a slight fit between these parts. The lower surface 78 of portion 76 has a diameter which is approximately equal to the mouth diameter of the nozzle lower wall 70 so that the junction between surfaces 70 and 78 does not present any substantial step in the flow-path defined by the mouth 18. The air tube 24 is mounted on the lower surface of the third section 72 at the junction between the lower surface 78 and the lower surface 80 of third cylindrical portion 74. A hole 82 through the portion 74 opens into the internal passage of air tube 24 to provide fluid communication between the hole 82 of air tube 24 and

orifice 84 within the mouth 18. Third section 72 may be longitudinally formed of one piece, or formed in multiple pieces and subsequently joined.

The fourth section of the housing 12 is the mouthpiece 26, which has a generally cylindrical portion 84 which is telescopically received within the open downstream end of third generally cylindrical portion 74 (which also defines the open end 20 of the mouth 18). The portion 84 is attached to an actuator stage 86, which is in turn attached to the reduced diameter portion 22 which is located into a user's mouth. The outer diameter of portion 84 is approximately equal to the diameter of lower surface 80 so as to provide a tight fit therewith.

The housing 12 advantageously is formed of a plastic such as polystyrene, polypropylene, polyethylene, ABS, polycarbonate, or polycrystalline. The housing 12 may be manufactured by any suitable technique such as injection molding or blow molding.

FIG. 3A shows an alternative construction of an actuator and nozzle assembly 26 for the holder 12, in cross-sectional view on the horizontal plane indicated in FIG. 3. The actuator and nozzle assembly 26 includes two opposed open discharge orifices 28a which are both fluidly connected to the lower 28b end which converges toward each other in the direction of the mouthpiece 26. Thus, depressing the chamber 12 so as to discharge a controlled volume of medication into the lower 28b causes two opposed plumes to be emitted from the pair of orifices 28a. The plumes converge and impinge on each other upstream of the air tube orifice 24.

causing the second to spread out, thereby aiding mixing of the second with air. Additionally, impingement of the two plumes aids in creating smaller droplets, which enhance evaporation of propellant. It will be appreciated that the convergence of chamber, the lower 28b is shown as being divergent in the horizontal direction and within 28a are shown as being spaced apart in the horizontal plane. Advantageously, however, the lower 28b may simply be extended in the vertical direction and the orifices 28a vertically spaced apart and angled toward each other so as to achieve the desired convergence of the two plumes.

FIG. 4 depicts an alternative construction of an holder 12a in which the elongated air tube 24 of holder 12 has been replaced by a shorter air tube in the form of a bell 42a which is supported in the mouth 14 by a pair of bell supports 42b. In FIG. 4, parts identified by reference numerals having the letter "a" suffix denote parts analogous to those having the same reference numerals without the suffix in FIG. 3, while parts identified with identical reference numerals to FIGS. 3 and 4 denote identical parts. Thus, the bell 42a is analogous to the orifice portion 42 of the air tube 24, and the supports 42b are analogous to the orifice portion 42 of air tube 24. The bell 42a includes a conical cavity 42c of a first diameter, and an outer passage 26a of a second smaller diameter. The outer passage 26a is generally conical with the mouth 18 and oriented so that air flowing toward chamber 12 is directed toward the nozzle orifice 20. The internal passage of orifice 42a are connected to outside air by a pair of holes 42d through the cylindrical portion 74a. In the

contour of the intake 12 is shown in FIG. 4, there is no section of the leading edge of the second intake 14 of FIG. 3. Thus, the upper 34 have been obtained from the intake 12. However, the secondary air inlet 46 is not present in the intake 12 to provide a boundary layer of low drag on the rear wall of the cascade 12.

FIGS. 3 and 4 illustrate the cascade construction of an intake in accordance with the principles of the present invention. FIG. 3 schematically depicts a horizontal cross section analogous to FIG. 1, showing an intake 12 in which the second intake 14 is directed away from the rear so that the second intake reverse direction before being captured. FIG. 4 schematically depicts a vertical cross section of the intake 12. Again, the parts are shown by the reference numerals, while the second intake 14 is shown by the letter "B" with. The intake 12 includes a leading edge including a cascade 12 which has a first closed end defined by an end wall 10 and a second open end defined by a multipiece partition 22 adapted to be lowered into a user's mouth. The cascade 12 has a first larger internal cross-sectional area over the majority of its length, narrowing to a second smaller internal cross-sectional area at the multipiece partition 22. The leading edge includes a multipiece partition 140 which protrudes from the cascade 12 in a direction between the end wall 10 and the multipiece partition 22. The multipiece partition 140 receives a constant pressure gradient (not shown). The leading edge further includes an external and square assembly 28 arranged at the bottom end of multipiece partition 140.

Thus, the second intake 14 provides the length of cascade 12 intake, thereby increasing resistance time of the second intake 14 before entering the multipiece 22. This leads to more complete expansion of liquid particles. Furthermore, the flow around the intake 12 is directed toward the multipiece 22 in substantially equal to the velocity of the user's inspired breath, reducing the position of stagnation in the intake and thus.

FIG. 7 depicts yet another construction of the invention providing external suction of the cascade to discharge a flow of medication in response to an action performed with the user's respiratory effort. An intake 12 includes a leading edge having a cascade 12 which is second intake 14 is formed for inhalation by the user. The cascade 12 is shown to include the air inlet 34 and the secondary air inlet 46. It may also include the rear 36 of intake 12. Alternatively, the cascade 12 may be a simple straight line with an open end at the rear of conventional construction. Thus, with the exception that the cascade 12 is not adapted to provide fluid communication with a chamber 122 by leading edge 22 as discussed below, the details of the cascade 12 are not important to an understanding of the basic-synchronous features of the invention.

The leading edge further includes a multipiece partition 140 which is connected to the cascade 12. The multipiece partition 140 comprises a generally cylindrical shape having a longitudinal axis 120 which is aligned in an oblique angle to the longitudinal axis of the cascade 12. A chamber 122 extends within the multipiece

such that the hollow outer walls of the chamber may be lowered into a hole 22 of the chamber and secure assembly 28. The details of the chamber and secure assembly 28 have already been described in connection with FIG. 1. The secure discharge outlet 20 is selected so as to direct an amount of air toward the end wall 10.

The intake 12 includes an internal section 12 which is generally aligned with the cascade 12. The internal section 12 has an open end at the open end and adjacent the end wall 10, and a closed end 140 adjacent the end wall 10 and defined by an end wall 340 which supports the chamber and secure assembly 28. The intake further includes an air inlet 340 connected to the end wall 10 and generally aligned with the cascade 12. The air inlet 340 further may have the inner section 12 toward the secure discharge outlet 20. The inlet 320 of air inlet 340 is connected to the outer air inlet 340 by a hole 90 through end wall 90. The outer 340 of air inlet 340 is in opposing relation to the outlet 20. Air flow is directed from the outlet 20 across the interior of the cascade 12 and proceeds toward the end wall 90 of inner section 12. Substantially of the air flow through the multipiece 220 causes air to enter through hole 90 into air inlet 340 and out the outlet 340 toward the plates. The plates and the air inlet 340 then cause the plates to flow toward and spread on a table lower section 92. Continued inhalation by the user causes the chamber 122 to collapse toward the open end 94 of inner section 12, and then reverse direction to flow through the space between the inner section 12 and the outer section 140, and then through the multipiece 220.

partition 140 with a longitudinal axis aligned with the longitudinal axis of the multipiece partition 140. Disposed between the multipiece partition 140 and the chamber 12 is an inner section 120. The inner section 120 has an open top end 102 through which the chamber 12 may be lowered, and an open bottom end 104 which is extended such that the chamber 12 cannot go through it but which nevertheless permits the hollow inner 12 of the cascade to be lowered into the hole 22 of chamber and secure assembly 28. More specifically, the inner 120 adjacent bottom end 104 has inwardly extending flanges 122 which meet the top portion 124 of the cascade. The cascade 12 is flexible which later shown along the direction defined by the longitudinal axis 120 of multipiece partition 140 so as to permit the cascade to be depressed toward the chamber and secure assembly 28 in order to obtain the chamber's contracting walls.

The inner section 120 is also aligned with the multipiece partition 140 along the direction of axis 100 for the purpose of placing the chamber 12 in a contracted position ready to be actuated. The multipiece partition 140 has two longitudinal slots 148 circumferentially spaced apart about 90 degrees, one of which receives a pair of diametrically opposite legs or vanes 112 extending outwardly from the outer surface of lower section 120. Alternatively, the multipiece partition 140 may have only one slot 110 spaced 180 degrees apart and receiving the legs 112. Thus, the inner section 120 allows longitudinally within multipiece partition 140, the legs 112 slide longitudinally within the respective slot 110.

The bracket includes a generally cylindrical case ring 114 which fits over the ends of respective portions 141. The case ring 114 has an annular flange 116 on its inner end which extends outward beyond the outer surface of the bearing 110 so as to insure gripping of the case ring 114 by the user's hand. The lower surface 113 of ring 114 has a pair of diametrically extending recesses or case tracks 120 formed therein approximately 180 degrees apart which extend longitudinally upward to the open top end 122 of case ring 114. Each case track 120 provides a generally helical surface 124 in facing relationship with one of the legs 112 protruding upwardly from the lower sleeve 100 through ring 114. Thus, starting with the case ring 114 in a position in which each leg 112 is in contact with the lowermost portion of the respective case track 120 (i.e., the portion of case track 120 which is furthest from the top end 122 of case ring 114), rotation of case ring 114 through the arc defined by the case tracks 120 causes the legs 112 to ride along the helical surfaces 124 and thereby operatively advance the lower sleeve 100 in the longitudinal direction toward the top end 122.

This upward movement of the lower sleeve 100 causes the container 12 to spread by virtue of the hinges 105. Rotating the spread movement of the container 12 is a compression spring 126. The spring 126 is attached to the lower surface of a removable end cap 123 which supports the top end 120 of the respective portions 141 and the top end 122 of the case ring 114 to completely enclose the container 12 in the housing. When the end cap 123 is then hatched, the spring 126 bears against the end

A helical spring 126 is attached to the top end 122. The trigger 134 has two spaced-apart parallel prongs 136 (FIG. 6) which extend along the direction of axis 134 in approximately the longitudinal axis 128 of the respective portion 141. The prong 136 are spaced apart by a distance D which is slightly greater than the diameter of the container neck 120 from which the discharge pass 19 protrudes, so as to allow rotation of the trigger 134. Thus, when the plunger assembly 132 is fully extended toward the container 12, the container neck 120 causes lower edge portions 140 of the prong 136, as indicated by the dotted regions in FIG. 6. However, when the plunger assembly 132 is withdrawn along axis 134 away from the container 12, the container neck 120 clears the prong 136 so that movement of the container 12 toward the container 20 is permitted. The prong 136 includes portions 137 which slope gently away from the container neck 120 in the direction along axis 134 toward the container. The portions 137 ensure the absence of force required for disengagement of the trigger 134 from the container neck 120.

Movement of the plunger assembly 132 in the direction away from the container 12 is opposed to air pressure within a vacuum-chamber chamber 142 within the housing. The chamber 142 is defined by the shell 126, the bearing wall 144, and a flexible diaphragm 146 which supports the shell 126 to the wall 144 in a substantially air-tight manner. Alternatively, the diaphragm 146 includes a circular portion 148 which is spaced the side of shell 126 facing the container 12, and a disk 148 which depends from the inner edge of the circular portion 148 and attaches to the bearing

of the container 12, leading the container downward toward the container end section assembly 26. When actuating the container 12, the downward movement of the container 12, the spring 126 would move the container downward until the discharge pass 19 were fully depressed from the container so as to cause discharge of a measured volume of the container contents. However, the bracket 120 includes a mechanism which engages the container to prevent this downward movement, with the mechanism being responsive to an auxiliary effort of a user exerted on the open end of the shell 146 so as to discharge from the container during the user's intention to allow the spring 126 to move the container back to discharge position.

To this end, the bracket 120 includes a plunger assembly 132 which is movable relative to the container 12 along an axis 134 generally vertical to the longitudinal axis 128. The plunger assembly 132 includes a circular disk 136 having a shell 138 extending concentrically downwardly around axis 134 and protruding outward from both sides of the shell 136. A first portion 140 of the shell 138 protruding from the side of the shell 136 remote from the container engages a recess 142 in a wall 144 of the housing, the recess 142 guiding the movement of the plunger assembly 132 along axis 134. A second portion 146 of shell 138 protruding from the side of the shell 136 facing the container extends through an opening 148 in respective portion 146, terminating at an enlarged head end 150. A compression spring 152 is captive between the head end 150 and the wall of the respective portion 146, biasing the plunger assembly 132 toward the container 12.

With reference to FIG. 7, the housing wall 144 comprises a removable cover 170 of the housing, and an edge of the shell 146 is attached to the housing by being sandwiched between the cover 170 and the remainder of the housing. The circular portion 146 of diaphragm 146 includes a central hole through which the case 134 extends and which slightly exceeds the shell 138 to provide a substantially airtight seal therebetween.

The removable cover 170 includes a recess 172 facing the shell 138 which aligns with a passage 174 formed in a sidewall 176 of the housing. The passage 174 extends toward the open end 20 of the shell 146. The central hole is formed in at least two sections, a first generally cylindrical section 178 which includes the sidewall 176 and is connected to the end wall 20 through which the flexible section 20 extends, and a second generally cylindrical section 180 which includes the air valve 24 and which connects to the first section 178. The passage 174 terminates at the end of the first section 178 which connects to second section 180. A passage 176 through a sidewall 178 of the second section 180 is fluidly connected with and forms an extension of passage 174. The passage 176 extends from the lowermost passage 182 of the air valve 24. A second disk 184 is hatched from the air valve passage 182. The recess 124 includes a resilient portion or sleeve 126. Air passages 122 extend through the recess 124 in the vicinity of the shell 126. The second disk 184 is disposed in passage 182 such that the air passages 122 align with the passage 176. Thus, fluid communication is provided between the second section 180



and the variable-volume chamber 142 by air passage 173, passage 175 is opened and the valve 140 is closed. The air passage 173 is closed and the valve 140 is opened.

It will therefore be appreciated that when a user inhales through the open end 20 of mouth 16, air is drawn from outside the mouth 16 through air inlet 34 into the primary air passage of the mouth 16. This air flow is drawn through the nozzle 18, and consequently a below-atmospheric air pressure exists in the mouth 16. This below-atmospheric air pressure is communicated to the chamber 142, with the result that the walls of the chamber 142 are subjected to a force proportional to the pressure difference between atmospheric pressure outside the chamber 142 and the below-atmospheric pressure inside the chamber 142. Consequently, air within the chamber 142 begins to contract the chamber 142 through means 173, through passage 174 and 175, through passage 173, and into the nozzle 18, and passes through the air inlet 34 into the primary air passage of the mouth 16.

As the user continues to inhale through the mouth 16, expansion of air from the chamber 142 causes the volume in chamber 142 to increase, with the result that the flow 136 and the shaft 132 begin to move toward the wall 134 against the force of the spring 132. Accordingly, the trigger 134 begins to move so as to disengage the pump 136 from the chamber 142. When the decrease in volume is sufficient to move the trigger 134 far enough to empty chamber 142 from the mouth 16, expansion of the chamber 142 toward the valve 140 is no longer

has decreased enough to cause activation. It will also be appreciated that the degree of flow being inhaled of a breath and activation is dependent on a number of factors, the primary factors being the cross-sectional area of the chamber 142 and the spring constant of the spring 132, since a discharge of medication requires a certain minimum level of the chamber 142 to cause the discharge area 17 to be fully depressed, and the travel is proportional to the pressure difference across the chamber 142 in cross-sectional area defined by the spring constant. Accordingly, the inhaler 10 may be designed with appropriate selection of these factors so as to achieve activation of the chamber 142 near the peak of a user's inhalation.

Moreover, the inhaler 10 provides two alternative methods of the chamber 142 which automatically adjust to the user's rate of inhalation to discharge the medication near the peak of the inhalation, i.e., near the point at which 50 percent of the volume which the user will eventually inspire with a full inhalation has been inspired. For instance, if a user with normal lung function inhales quickly through the open end 20, air will be evacuated from the chamber 142 more rapidly so as to achieve activation in a relatively short time. Conversely, if a user with impaired lung function inhales slowly through the open end 20, air will be evacuated more slowly from chamber 142 so as to achieve activation in a relatively longer time.

The inhaler 10 further includes an adjustable screw 190 which extends through the housing 12a into the passage 174 to form a restriction within passage 174. By turning the screw 190 one direction, the screw 190 causes further

inward, and the force of spring 132 causes the valve 140 to move toward an open position, and the force of spring 132 causes the valve 140 to move toward a closed position, and the force of spring 132 causes the valve 140 to move toward an open position, and the force of spring 132 causes the valve 140 to move toward a closed position. A certain flow of medication medication is thereby discharged from mouth 16 into the mouth 16 for inhalation by the user.

After the inhaler 10 has been activated to dispense a dose of medication, it must be recharged so that it is ready to be discharged again. To do this, the user grasps the ring 114 and causes it with respect to the housing 12a through the air defined by the screw 190. This causes the lower chamber 132 and chamber 142 to be tilted upward against the force of spring 132. When the chamber 132 is tilted upward sufficiently to allow the trigger 134 to clear the chamber 142, the spring 132 urges the trigger 134 toward the chamber 142 so that the trigger 134 now again is in a fully extended position to engage the chamber 142. The user now again is in a fully extended position to engage the chamber 142. The user now causes the ring 114 back to its starting position to lower the chamber 142, whereupon the chamber 142 now again is in the pump 136 of the trigger 134. The inhaler 10 is then ready to be used again.

It will be appreciated that the below-atmospheric pressure described above provides an inhaler in which discharge of medication is automatically responsive to the user's respiratory effort, so that the user does not have to exert any effort to operate the inhaler. Furthermore, discharge of medication does not occur immediately upon the user beginning to inhale on the open end of the mouth, but rather is automatically delayed until the volume of chamber 142

into passage 174 to increase the restriction, and by moving the screw 190 the opposite direction, it tends to decrease the restriction. Thus, the timing of activation of the chamber 142 in relation to a particular portion of inhalation may be varied by adjusting the screw 190. Varying the screw 190 results in a variable in passage discharge across the walls of the variable-volume chamber 142 in a given flow rate on the open end 20 of mouth 16. Thus, for a given flow rate on the open end 20 of mouth 16, turning the screw 190 to increase the restriction of passage 174 will increase the time period required to evacuate the chamber 142 sufficiently to cause activation, whereas turning the screw 190 to decrease the restriction will decrease such time period.

FIG. 9 depicts a substantially identical construction of an inhaler having features for automatic breath activation of discharge. In this construction, the fixed trigger 134 is eliminated and the displacement means assembly 132 is replaced by a resiliently compressible bellows 200 which is disposed between a fixed wall 202 of the housing 12a and the chamber 142. The bellows 200 itself acts as the member which urges the chamber 142 in a retracted position, the bellows being compressed by air pressure from a position surrounding the chamber 142 to move into a discharge position.

The bellows 200 is automatically made of material and will tend to expand and will 204 in the end adjacent the chamber 142, the end wall 204 being integrally formed with the expansion-actuated side wall 206. The bellows 200 has a

sected end wall 208 at the end adjacent the bearing wall 202, the end wall 208 also being longitudinally formed with the side wall 204. The second end wall 208 is joined by a rib or flange 210 which constitutes an air passage into the interior of the bellows 200. The flange 210 subsequently is a resilient seal when similar to a hydraulic seal and is longitudinally attached to one end of the end wall 208 by welding or other suitable attachment. The free end 212 of the flange 210 extends to a distance of about one inch 214 to the other end 216 of a second 216. The second 216 is disposed within a slot 218 which extends from the left end 220 which draws air from outside the labiate housing, as in each end 222 which is arranged within the conduit 200 drawn opposite the mouth discharge outlet 20. The slots 218 and second 216 may also be formed of resilient seal.

A support member 224 is attached to the right end wall 204 of the bellows 200. The support member 224 contains the casing neck 118. Complete the range of motion undergone by the casing by moving from a rest or ready position to a discharge position. The bellows 200, via the support member 224, causes a spring force on the casing neck 118. The force of the bellows 200 acts in a direction tending to move the casing neck 118 away from the casing 24. Additionally, as it well known, the casing 18 contains an internal spring gun device which acts between the casing body and the bellows neck end 19 in a direction tending to move the casing 18 away from the casing 24. The spring constant of the bellows 200 is selected such that the sum of the spring force

causes, air pressure is applied against both end walls of the bellows 200, and the bellows 200 moves to its ready position, the force of the bellows 200 and internal spring forcing the casing 18 back against the force of the spring 120 into the ready position. Thus, with the hand-actuated system depicted in FIG. 9, there is a need for a separate actuating system.

The bellows 200 preferably has a spring constant of about 1 pound per inch to about 12 pounds per inch, and a cross-sectional area of about 0.5 to about 0.75 square inch. Thus, a pressure differential of about one pound per square inch across the bellows 200 is sufficient to compress the bellows 200 by an amount of about 0.020 inch to about 0.030 inch. With a standard casing 18, only about 0.030 inch of relative movement is required between the discharge neck 19 and the casing body in order to cause discharge. Accordingly, the second 216 must be closed to cause a gas pressure within the throat 214 of about one pound per square inch.

While the present invention has been illustrated by a description of various embodiments and while these embodiments have been described in considerable detail, it is to be understood that the invention is not limited to the specific details, arrangements, apparatus and methods, and that various changes, modifications and alterations may be made therein without departing from the spirit and scope of applicant's general inventive concept.

caused by the bellows 200 and the force caused by the internal spring is slightly greater than the force caused by the spring 120 (FIG. 7) which causes a force on the end of the casing 18 in the direction to tend to move the casing 18 toward the chamber 16 into its discharge position. Thus, at rest, with atmospheric pressure acting both inside and outside the bellows 200, the bellows 200 and internal spring overbalance the force of the spring 120 and thereby keep the casing 18 in a ready position preventing discharge of combustion chamber.

However, when a user inhales through the mouth (not shown) of the labiate, air is drawn through the slot 214, as previously described in connection with the bellows 200, which causes a low pressure within the throat 214 of second 216. This low pressure is communicated via the connection tube 212 and mouth 216 to the interior of the bellows 200. As a result, the pressure within the bellows 200 is less than the atmospheric pressure which surrounds the outside of the bellows 200, and therefore there is an air pressure force caused on the left end wall 208 in the direction toward the bearing wall 202. The sum of this air pressure force and the force of the spring 120 exceeds the spring force exerted by the bellows 200 and the labiate internal spring, causing the left end wall 208 of bellows 200 to be compressed toward the bearing wall 202. By virtue of the force exerted on the casing 18 by the spring 120, the casing 18 moves the end wall 208. With combined movement of air from the bellows 200, the casing 18 is moved into its discharge position. Once the user ceases his inhalation and air flow through the mouth 216

through any arrangement having the throat tube outside the primary air passage defined by the labiate mouth. Additionally, the various end bellows 200 of FIG. 8 may advantageously be used in the labiate configurations depicted in FIG. 7, with the bellows 200 replacing the plane assembly 132 and the left end wall 208 of the bellows 200 being attached to the fixed support 134, and the spring 120 being attached by virtue of the elasticity of the bellows 200. The invention is by broader aspects is intended to include the specific details, arrangements, apparatus and methods, and that various changes, modifications and alterations may be made therein without departing from the spirit and scope of applicant's general inventive concept.

With reference to the use of the words "comprising" or "including" or "incorporating" in the foregoing description and in the following claims, unless the context requires otherwise, these words are to be construed broadly and not to be interpreted as being limited to the specific details, arrangements, apparatus and methods, and that such words are to be interpreted as encompassing the foregoing description under the following claims.

The claims defining the invention are as follows:

1. An upward flow control apparatus providing automatic discharge responsive to an inspiratory effort of a user, the apparatus comprising a passageway of induction including a canister body and a bellows discharge arm which is movable with respect to the canister body between an inoperative position in which discharge of exhalation is prevented and an operative position in which exhalation is discharged through the discharge arm.

a housing adapted to support the canister and permit movement thereof between a first position in which the discharge arm is in the inoperative position to a second position in which the discharge arm is in the operative position, the housing further defining a primary air passage including an inlet through which a user can inhale and also defining a secondary air passage connecting between the primary air passage and within air outside the primary air passage, the secondary air passage including a vented leading a throat, a variable-volume device arranged within the housing and including a well which is movable with respect to the housing, the variable-volume device defining a variable-volume chamber therein in fluid communication with the vented throat;

a canister member affixed to the movable well of the variable-volume device, the canister member being movable with the movable well from a rest position in which the canister is in the first position and which maintains between the canister body and discharge arm is prevented, to a discharge position in which the canister is free to move into the second position;

a canister member which urges the canister into the second position upon movement of the canister member into discharge position; and

the variable-volume chamber being in fluid communication with the primary air passage, whereby inhalation of a user through the inlet causes air to be drawn through the vented throat thereby causing a low pressure in the throat which is communicated to the variable-volume chamber, the low pressure causing air to be sucked from the chamber and thereby cause the movable well to move the canister member into the discharge position.

2. The upward flow control apparatus of claim 1, wherein the vented throat is connected to the chamber by a third air passage within the housing, and further comprising an adjustment device which may be selectively positioned to selectively vary the flow rate

6. The upward flow control apparatus of claim 1, wherein the variable-volume device comprises a resiliently compressible bellows, the bellows being disposed between a neck of the canister and a wall of the housing which faces the canister neck, the movable well being on one end wall of the bellows, the canister member being affixed to the end wall and restricting the canister neck, the bellows being compressible toward the housing wall in a direction substantially parallel to the direction in which the canister member from the first position to the second position, the bellows being adapted to create a spring force on the canister tending to urge the canister toward the first position, the spring force exceeding the force exerted on the canister by the suction member by a predetermined amount which is selected such that when a user inhales through the inlet of the housing, the pressure force created on the end wall of the bellows by the difference between atmospheric pressure outside the bellows and the low pressure inside the bellows exceeds the predetermined amount, thereby causing the end wall to compress the bellows toward the housing wall and move the canister member into the discharge position such that the canister is moved into the second position by the suction member.

7. A method for defining a dose of medication using an upward delivery apparatus which houses a medication-containing canister having a canister body and a bellows discharge arm movable with respect to the canister body between an inoperative position in which discharge of medication is prevented and an operative position in which medication is discharged through the discharge arm, with the canister being movable within the apparatus between a first position in which the inlet arm is in the inoperative position and a second position in which the inlet arm is in the operative position, the apparatus including a housing defining a primary air passage having an inlet through which a user can inhale and a secondary air passage, the apparatus including a discharge of medication from the canister with an inspiratory effort of a user through the inlet, the method comprising

shifting the canister to the first position;

preventing movement of the canister into the second position by a canister member which engages the canister to prevent said movement and which is movable in response to sub-atmospheric air pressure within a variable-volume device arranged within the housing, the variable-volume device defining an air chamber therein, the canister member being movable to permit the canister to move into the second position upon a predetermined change in volume of the air chamber;

urging the canister toward the second position;

through the third air passage to a given flow rate through the primary air passage, thereby varying the timing of medication discharge in relation to the inhalation cycle of a user.

3. The upward flow control apparatus of claim 1, wherein the variable-volume device comprises a plunger which is axially mounted to a wall of the housing by a double shoulder, and the canister member includes a member which is attached to the plunger and which in the first position limits the path traveled by the canister between the first and second positions so as to prevent the canister from moving into the second position, movement of air from within the chamber of the variable-volume device causing the plunger to move toward the housing wall and thereby withdraw the member from the discharge position permitting the canister to move into the second position.

4. The upward flow control apparatus of claim 1, wherein the housing comprises a main body portion which receives the canister, and an end cap which covers the end of the canister opposite from the end with the discharge arm and which engages the main body portion to prevent backflow around the device, the device member comprising a compressible spring between an inner surface of the end cap and the canister such that the spring being against the canister when the end cap is engaged with the main body portion.

5. The upward flow control apparatus of claim 1, wherein the main body portion includes a generally cylindrical receptacle having a longitudinal axis and defining a generally cylindrical space in which the canister resides, and further comprising a locking device including:

an inner sleeve which surrounds the canister within the receptacle, the inner sleeve and canister being slidable together as a unit within the receptacle along the longitudinal axis, the inner sleeve further including at least one pin extending outwardly from an outer surface thereof through a slot in the receptacle; and

a locking ring which surrounds the receptacle and has a surface which engages the at least one pin, the locking ring being movable with respect to the receptacle so as to move the pin in the direction defined by the longitudinal axis toward the end cap so as to draw the inner sleeve and canister upward and thereby move the canister into a locked position which permits the canister member to move into its rest position, thereby enabling the apparatus for automatic response to the inspiratory effort of a user.

upon a user inhaling through the inlet, drawing air through a secondary air passage arranged within the housing, the secondary air passage extending from the primary air passage to ambient air outside the primary air passage, the secondary air passage including a vented leading a throat; and








at least during the drawing step, providing fluid communication between the three portions of the vented of the secondary air passage and the variable-volume air chamber so as to communicate a below-atmospheric air pressure caused by the vented to the air chamber and thereby cause the chamber volume to decrease, whereby the canister member moves to permit said movement of the canister into the second position to discharge medication when the predetermined decrease in chamber volume is reached.

8. The method of claim 7 wherein the three portions of the vented has a sub-atmospheric flow area relative to the remainder of the secondary air passage such that the air pressure in the three portions is lower than the air pressure in the remainder of the secondary air passage when air is flowing therethrough.

DATED this 14 day of July 2004

SYSTEMS PALMONTARY DELIVERY, LTD.  
By its Patent Attorney,  
R. F. WELLINGTON & CO.,

*Ben Wellington*  
Patent Attorney

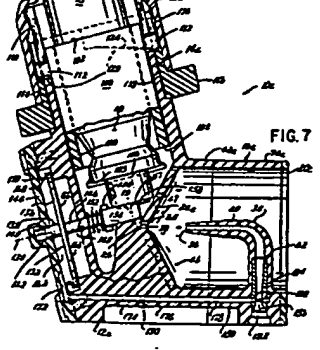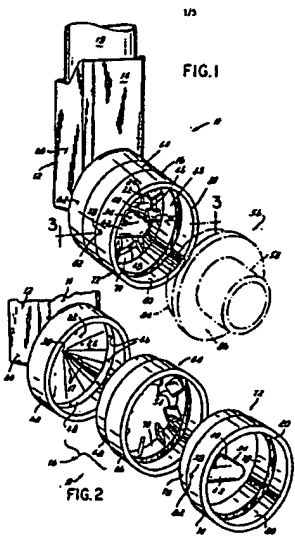




FIG. 9